

PATENT ABSTRACTS OF JAPAN

(11)Publication number : **2003-206426**

(43)Date of publication of application : **22.07.2003**

(51)Int.Cl.

C09D 11/00

B41J 2/01

B41M 5/00

(21)Application number : **2002-317573**

(71)Applicant : **HEWLETT PACKARD CO <HP>**

(22)Date of filing : **31.10.2002**

(72)Inventor : **CHOY MARK L**

(30)Priority

Priority number : **2001 003626**

Priority date : **31.10.2001**


Priority country : **US**

(54) INK COMPOSITION AND METHOD OF INK-JET PRINTING ON HYDROPHOBIC MEDIUM

(57)Abstract:

PROBLEM TO BE SOLVED: To provide an ink for ink-jet printing on a hydrophobic medium by a short drying time, and to provide a method of ink-jet printing.

SOLUTION: The ink and fixer compositions are used for printing on the hydrophobic medium. The ink composition includes a water-soluble dye and a vehicle. The vehicle includes water, a glycol ether, a humectant and a nonionic surfactant. The method of printing on the hydrophobic medium includes the steps of providing the ink composition that includes the water-soluble dye and the vehicle including the water, the glycol ether, the humectant and the nonionic surfactant, and providing the fixer that includes a binder and a vehicle comprising water, a glycol ether, a humectant and a nonionic surfactant. The method of printing may further include a step for applying heat to the hydrophobic medium during and/or after the ink deposition. The method of printing may yet further include steps of providing a fixer composition and depositing the fixer composition on the hydrophobic medium before or after, or both before and after the ink is deposited.

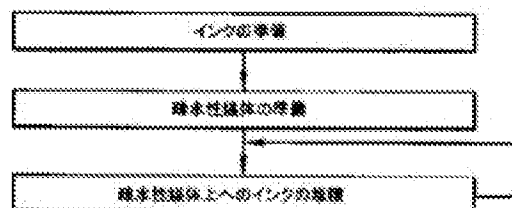

* NOTICES *

JPO and INPIT are not responsible for any damages caused by the use of this translation.

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.**** shows the word which can not be translated.

3.In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1]An ink composition containing water soluble dye and a vehicle containing water, glycol ether, a wetting agent, and a nonionic surface active agent.

[Claim 2]The ink composition according to claim 1 chosen from a group to which said glycol ether changes from ethylene glycol butyl ether, propylene glycol propyl ether, ethylene glycol ethyl ether acetate, and propylene-glycol-methyl-ether acetate.

[Claim 3]Said wetting agent 2-pyrrolidone, N-methyl-Pirro ****- 2-one, 1,3-dimethyl- imidazolidine 2-one, an octyl-pyrrolidone, Ethylene glycol, a diethylene glycol, triethylene glycol, The ink composition according to claim 1 or 2 chosen from a group which comprises tetraethylene glycol, propylene glycol, a polyethylene glycol, a polypropylene glycol, butanediol, pentanediol, hexandiol, and glycerin.

[Claim 4]Said nonionic surface active agent Alkyl polyethylene oxide, alkylphenyl polyethylene oxide, Hydroxylation acetylene polyethylene oxide, alkoxy-ized polyethylene oxide, The ink composition according to any one of claims 1 to 3 chosen from a group which comprises polyethylene oxide ester, polyethylene oxide amine, polyethylene oxide amide, a polyethylene oxide polypropylene oxide copolymer, and organic silicone surfactant.

[Claim 5]Concentration of said glycol ether is about 5 to about 15 % of the weight, and concentration of said wetting agent is about 5 to about 15 % of the weight, The ink composition according to any one of claims 1 to 4 whose concentration of said water soluble dye concentration of said nonionic surface active agent is about 0.5 to about 3 % of the weight, and is about 2 to about 4 % of the weight.

[Claim 6]A fixing agent constituent comprising:

An adhesive agent.

A vehicle containing water, glycol ether, a wetting agent, and a nonionic surface active agent.

[Claim 7]The fixing agent constituent according to claim 6 chosen from a group to which said adhesive agent changes from cation polymer, anion polymer, and a salt of multicharged ion.

[Claim 8]A step which prepares ink, a step which prepares hydrophobic print media characterized by comprising the following, A printing method to a hydrophobic medium top containing a step to which thermal ** is performed by piezo-electric ink jet printing, and which makes said ink deposit on said hydrophobic print media, and a step which applies heat to said hydrophobic print media.

Water soluble dye.

A vehicle containing water, glycol ether, a wetting agent, and a nonionic surface active agent.

[Claim 9]Including a base in which said hydrophobic print media has the surface covered with hydrophobic polymer material, said base consists of cellulose materials and and said polymeric material, A method according to claim 8 chosen from a group which comprises styrene butadiene polymer, acrylic polymer, and acetic acid vinyl polymer.

[Claim 10]A step and an adhesive agent which prepare ink containing water soluble dye and a vehicle containing water, glycol ether, a wetting agent, and a nonionic surface active agent, A step which prepares a fixing agent containing a vehicle containing water, glycol ether, a wetting agent, and a nonionic surface active agent, A printing method to a hydrophobic medium top containing a step which prepares hydrophobic print media, a step which makes said ink deposit on said hydrophobic print media, and a step which makes said fixing agent deposit on said hydrophobic print media.

[Translation done.]